


Tender – Street Rehabilitation – Eastern Gateway Phase 2


Addendum # 3 Issued – January 26, 2024

- 1. The attached sketch (SK-1) replaces the "Cast-In-Place Concrete Pole Base for RRFB" detail shown on Drawing No. 4-1.
- 2. The attached sketch (SK-2) replaces the "Street Light Concrete Base" detail shown on Drawing No. 10-4.
- 3. In Section 33 41 00 Storm Sewer, replace clause 2.3 with the following:
 - 2.3 HDPE PIPE (up to 900mm diameter only)
 - .1 Double walled HDPE pipe with smooth walled interior and corrugated exterior to 320 kPa to CSA B182.6.
 - .1 Locked-in flexible rubber gasket and integral bell and spigot system.
 - .2 Connect to catchbasins with PVC manhole adaptor.
 - .3 Acceptable products: Solflo Max by Soleno, Boss 2000 by Armtec and N-12 ST by ADS.

- End of Document -

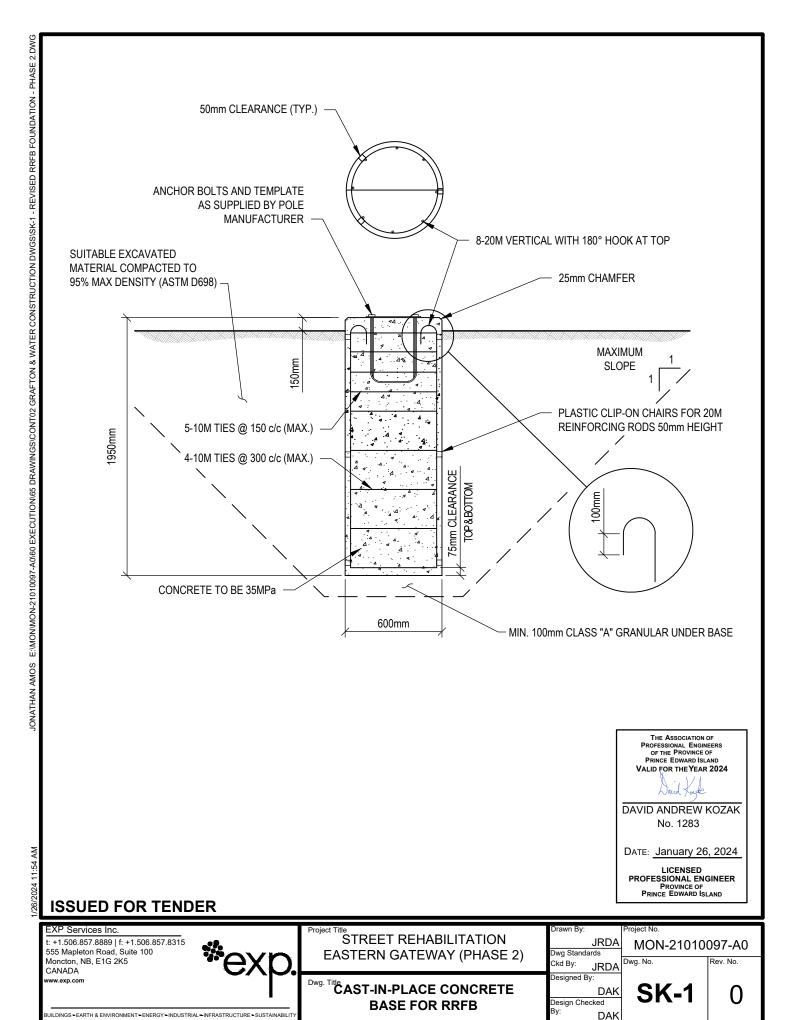

EXP Services Inc. © 2023

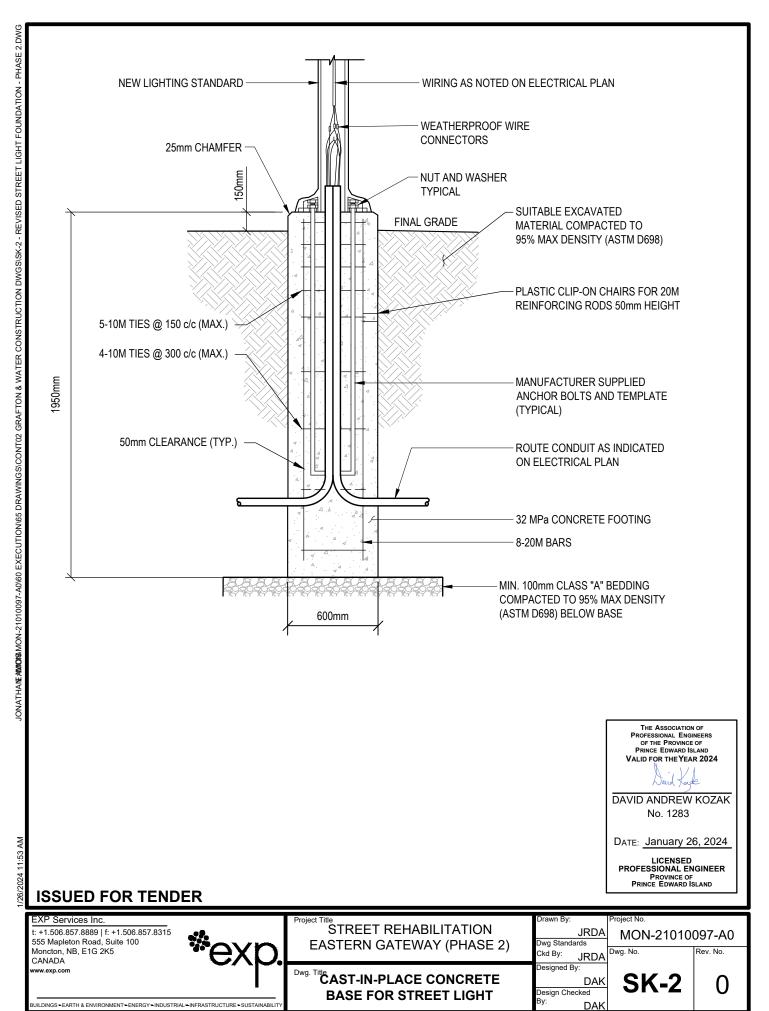

EXP Services Inc. © 2023